




**NYCO**  
AERONAUTICS & DEFENCE

# PRESERVATION SOLUTIONS

## HIGH PERFORMANCE & MULTI-PURPOSE LUBRICANTS

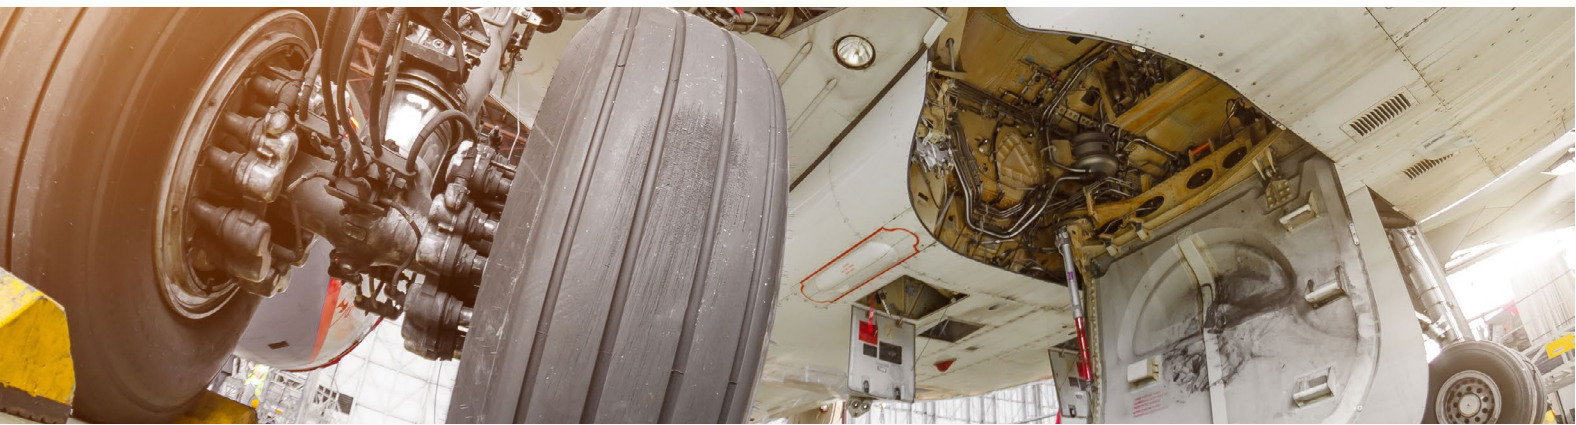

PROTECTION OF OIL CIRCUIT  
DURING STORAGE

NYCOLUBE® 11B

MULTI-PURPOSE GREASE


NYCO GREASE® GN 148

SHOCK STRUT FLUIDS

HYDRAUNYCOIL® FH 6AW

PROTECTION OF FUEL CIRCUIT

TURBONYCOIL® 3516

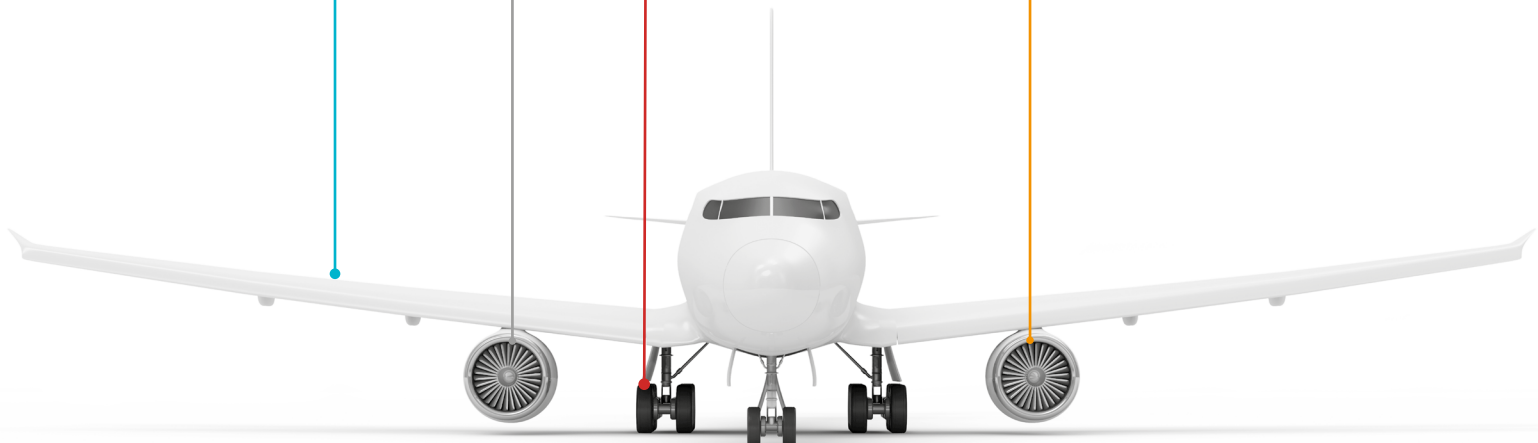

For a complete list of NYCO range of solutions, refer to our products catalogue for Aeronautics & Defence or visit [www.nyco-group.com](http://www.nyco-group.com)



## PROTECTIVE FLUIDS

### TURBONYCOIL® 3516

**Specification:** MIL-PRF-6081 E Gr. 1010 / AIR 3516A ISS.2

**OEM approvals:** Boeing D00623 and D00124 / CFMI CP5066 / Pratt & Whitney PMC 9852 / Airbus Helicopters CM133 / Rolls Royce Mat Number 1024A / GE C02-021

**Preservation oil for engine fuel systems (Fuel Control Unit).**

- Low viscosity at very low temperature, down to -60°C;
- Compatible with fuel on all types of platforms.



### NYCOLUBE® 11B

**Specifications:** MIL-PRF-6085 E / AIR 3511A / DEF STAN 91-49 Iss. 1 / OX-14

**OEM approvals:** Boeing D00664 / CFMI CP5067 / Pratt & Whitney PMC 9123 / Airbus CML 03AGB1 / ATR CML 03-007 / Airbus Helicopters CM174 / GE C02-050 / Rolls Royce Mat Number 1061B

**Preservation oil for engine lubrication systems.**

- Low viscosity at very low temperature, down to -60°C;
- Compatible with fuel on all types of platforms.

### NYCOPROTEC® 05

**Specifications:** NATO C-609, conform to MIL-C-6529 (Type 2, amd. 2)

**OEM approvals:** Use in Lycoming SL No. L180B  
**Preservation oil for aviation piston engine.**

## MULTI-PURPOSE GREASE

### NYCO GREASE® GN 148

**Specification:** MIL-PRF-23827 Type I / SAE AMS-3052

**OEM approvals:** Airbus AIMS-09-06-002 / Boeing BMS 3-33 C / Pratt & Whitney PMC 79671

Boeing codes:	Airbus CML codes:
Boeing CML D00013	Airbus CML 03GBC1
Boeing CML D00015	Airbus CML 03GBD1
Boeing CML D00633	Airbus CML 03HBC1
Boeing CML D50180	Airbus CML 03HBD9

**Multi-purpose airframe and landing gear anti-corrosion grease for re-greasing before storage/preservation.**

- Excellent protection against wear and corrosion;
- Longer durability;
- Improved corrosion properties;
- Extended bearing life and maintenance intervals.



## SHOCK STRUT FLUID

### HYRAUNYCOIL® FH 6AW

**Specifications:** Boeing BMS 3-32 C Type I

**OEM approvals:** Boeing CML D50022 / Airbus CML 02CBB1

**Shock strut hydraulic fluid with anti-rust and anti-wear additives, designed for service and preservation/storage**

HYRAUNYCOIL® is the factory fill fluid for Safran Landing Systems.



For more information, contact your local representative or visit [www.nyco-group.com](http://www.nyco-group.com)